Yankee Barn Homes

True Roof™ and True Wall Panels

TRUE ROOF™ VENTED PANEL

⅝ Zip System™ Roof Sheathing

Rafters, oriented to create an air vent between sheathing and insulation from soffit to ridge

Double Foil-Faced Extruded Polyisocyanurate Insulation 9 ½" thick (with options to 10"), vertically aligned

Foil-Faced Polyisocyanurate Insulation 1-1/2" thickness, horizontally oriented to form an effective air stop

½ Drywall Thermal Barrier

Vapor Barrier

(Optional) Pre-applied 1x8 Pine Tongue and Groove Interior Finish


TRUE WALL PANEL

Pre-installed Windows

Double Foil-Faced Extruded Polyisocyanurate Insulation, 4" (with optional 6") thickness

2x6 (with optional 2x8) wall studs, 16" on-center

1/2" Zip System™ Wall Sheathing

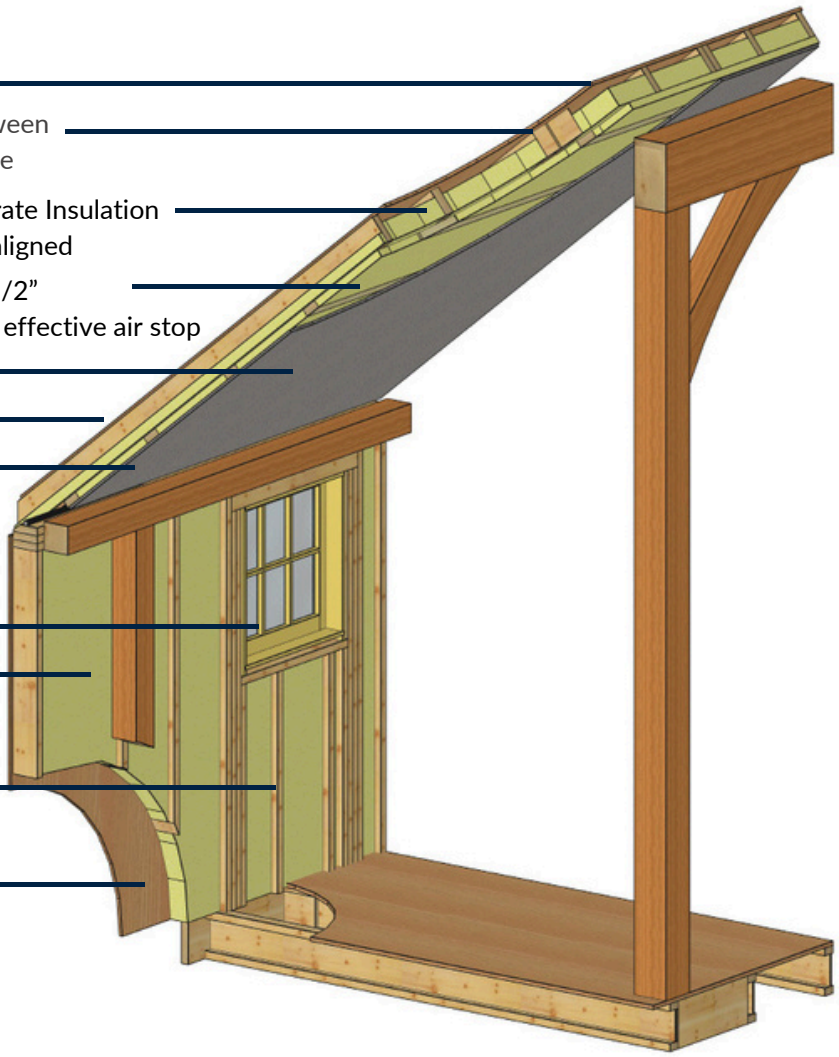

TRUE ROOF™ VENTED PANEL

Create a vented "cold roof" system, preventing snowmelt from forming dangerous icicles in the winter and providing a buffer from the heat of the sun's summer rays.

OUR TRUE ROOF™ PANELS ARE PFS TECO CERTIFIED.

TRUE WALL PANEL

Built with pre-installed windows, eliminating waste created by the time consuming on-site cutting of SIP panels necessary to install windows. Further, True Wall Panels are sturdily fastened to 2x6 studs with hardware, rather than simply gluing wood sheathing to rigid foam insulation as with SIP's. Contractors remark the True Wall Panels are easy and fast to install, and make for a superior, energy efficient product.

YANKEE BARN HOMES 1969

WWW.YANKEEBARNHOMES.COM

131 Yankee Barn Road, Grantham, NH 03753 | (800) 258-9786

©2021 Yankee Barn Homes. All rights reserved.